

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



Ottawa Hull K1A 0C9

(21)	(A1)	2,132,567
(22)		1994/09/21
(43)		1995/07/25

(51) Int.Cl. <sup>5</sup> A63B-059/12; B29C-067/14

(19) (CA) **APPLICATION FOR CANADIAN PATENT** (12)

(54) Composite, Pultruded Fiberglass Resinous Hockey Stick,  
Method and Device for Manufacture Thereof

(72) Ratchford, David - U.S.A. ;

(71) Power Stick Manufacturing, Inc. - Canada ;

(30) (US) 08/186,168 1994/01/24

(57) 20 Claims

Notice: This application is as filed and may therefore contain an  
incomplete specification.



1  
2  
3  
4                   Abstract of the Disclosure

5           An automated machine and process for the production of  
6 pultruded hockey sticks and similar linear products. The machine  
7 comprises a rigid elongated frame and a creel bank supplying  
8 rovings from individual spools. An elongated, rigid, hollow  
9 mandrel extends substantially along the entire length of the  
10 machine supported by the frame. A veil guide directs and wraps  
11 a veil around the mandrel at the front of the machine. The  
12 machine comprises serial segments, each having a pattern card, a  
13 gathering bracket and a spiral winding station. Each segment  
14 directs rovings onto the mandrel in a longitudinal layer  
15 circumscribed by a radial layer comprising separate spaced apart,  
16 continuous rovings forming concentric helixes. The winding  
17 stations are synchronized and counter-rotate. A third pattern  
18 card converges a third longitudinal layer of rovings toward the  
19 mandrel. A resin injection die penetrated by the manifold  
20 gathers the rovings from the third card and saturates the  
21 uncompleted product with resin. Within the injection die, the  
22 mandrel has small diameter passages extending from a central bore  
23 to grooves on the surface for conveying resin from the bore to  
24 the rovings. A second veil guide directs an outer veil onto the  
25 resin impregnated rovings. A heater penetrated by said manifold  
26 heats the resultant resin impregnated product. A curing die  
27 helps to maintain the outer shape imparted by the injection die  
28 and the heater while the product cures. Modified industrial  
29 pullers are used to pull the rovings about the mandrel at a  
30 predetermined linear speed to form the product.

2132567

TITLE: Composite, Pultruded Fiberglass Resinous Hockey Stick,  
Method and Device for Manufacture Thereof

Background of the Invention

I. Field of the Invention

The present invention relates generally to pultrusion processes, including processes for manufacturing composite hockey stick shafts. More particularly the present invention relates to methods and apparatus for manufacturing synthetic fiber pultruded products. Known prior art pertinent to the present invention can be found in U.S. Patent Class 273, subclasses 67 and others, Class 156, subclass 178 and U.S. Patent Class 264, subclass 171.

II. Prior Art

Historically, hockey sticks have been manufactured from wood. The handles and blades are glued together in a variety of configurations. The joint between the handle and the blade may be a tongue and groove joint or some type of socket joint. Generally these joints are reinforced to prevent breakage of a hockey stick at this point. Numerous other materials have been used to manufacture the handles and blades of hockey sticks. Laminated wood has been proven to be superior to solid wood. A laminated hockey stick is disclosed in U.S. Pat. No. 4,353,549 issued to Goupil on October 12, 1982. In order to avoid breakage of handles, metal handles have been used on some hockey sticks. Easton, U.S. Pat. No. 3,934,875, discloses an aluminum handled hockey stick with a plastic blade.

Various methods have been proposed to prevent blade breakage and to improve the "action" of the blade. Among these are U.S. Pat. No. 4,084,818 also issued to Goupil, which discloses a resin wrapping with a wear resistant heel. Franck U.S. Pat. No. 4,488,721 discloses a polycarbon wear surface for the base of a

1 blade. Tiitola, U.S. Pat. No. 4,059,269, discloses a layered  
2 plastic structure for a hockey stick blade. Harwell, U.S. Pat.  
3 No. 4,148,482, discloses a reinforcing net sock to be disposed  
4 over a blade during manufacture for reinforcement.

5       Wooden hockey sticks are expensive to manufacture due to the  
6 high cost of the "fine" wood which is necessary to give the  
7 hockey stick the proper "action" or "feel." Therefore,  
8 fiberglass and plastics have become popular substitutes.  
9 Additionally, when a wooded hockey stick breaks, it tends to  
10 splinter creating a sharp instrument which can be hazardous,  
11 particularly for an individual moving at a fairly high rate of  
12 speed on ice skates. Raw plastic and fiberglass materials have  
13 competitive cost advantages over wood.

14       Plastic hockey sticks have evolved over the years. Tiitola,  
15 U.S. Pat. No. 3,982,760, discloses a hockey stick made of layered  
16 plastic. Goverde, U.S. Pat. No. 4,013,288, discloses a foamed,  
17 nylon hockey stick. Adachi, U.S. Pat. No. 4,591,155, discloses a  
18 plastic hockey stick which is reinforced by fiberglass.  
19 Fiberglass strands are wrapped around the stick and a second  
20 layer of stands is laid lengthwise. Finally, cloth is used to  
21 "shroud" the stick.

22       Due to its versatility, fiberglass remains a popular  
23 material for hockey sticks. Deleris, U.S. Pat. No. 5,050,878,  
24 discloses a foam core fiberglass or carbon fiber hockey stick.  
25 Two wrappings of a fiberglass or carbon fiber material are used  
26 to reinforce the stick. McKinnon, U.S. Pat. No. 4,358,113,  
27 discloses a fiberglass hockey stick having a handle with a double  
28 box cross section intended to mate with a matching blade and to  
29 be secured with resin.

30       Combinations of wood, fiberglass and plastic are present in  
31 the art. Salminen, U.S. Pat. No. 4,369,970, discloses a  
32 laminated hockey stick constructed from wood and fiberglass in

1 alternating layers. Diederich, U.S. Pat. No. 4,134,587,  
2 discloses a fiberglass hockey stick having a wooden core.  
3 Redekop, U.S. Pat. No. 4,968,032, discloses a hockey stick with a  
4 wooden core and fiberglass and wood sandwiching layers on the  
5 exterior. Drolet, U.S. Pat. No. 4,684,130, discloses a wooden  
6 core hockey stick with a foam disposed between the wooden core  
7 and an exterior fiberglass sheeting. U.S. Pat. No. 5,217,221  
8 issued to Baum, discloses a foam core hockey stick which is  
9 wrapped in a fiberglass and a wooden veneer disposed on the outer  
10 face of the surface of the hockey stick. Hasegawa, U.S. Pat. No.  
11 5,160,135 discloses a wooden blade with fiber reinforced plastic  
12 faces.

13 Other synthetic materials have been proposed for various  
14 types of sporting equipment. For example, Bohannon, U.S. Pat.  
15 No. 4,848,745 discloses a thermoplastic resin baseball bat  
16 reinforced with helically wound fibers sandwiched between  
17 longitudinal fibers. Akatsuka, U.S. Pat. No. 5,156,396  
18 discloses a carbon fiber golf club shaft. The angle of  
19 orientation of the carbon fibers varies from layer to layer.

20 Several methods for manufacturing hockey sticks have been  
21 proposed. Adachi, U.S. Pat. No. 4,600,192, discloses a hockey  
22 stick handle constructed of joined "U" shaped sections of fiber  
23 reinforced plastic and the use of a mandrel to shape resin and  
24 fiber mat into a hollow handle. Carter, U.S. Pat. No. 4,681,722,  
25 discloses a method for making a lineal structural member which  
26 has a fiber core wrapped by fiberglass. Sweet, U.S. Pat. No.  
27 4,086,115, discloses a method for making a "pultruded" hockey  
28 stick comprising pulling resin impregnated fibers through a  
29 heated dye and layering it with fiberglass strips.

30 A review of the prior art reveals that it is desirous to  
31 provide a hockey stick which has the "feel" of a wooden hockey  
32 stick. In other words, it is desirous to provide a hockey stick

1 which does not have the limitations or expense associated with a  
2 wooden hockey stick, but that will provide an equal or better  
3 "flex and feel."

4 As evidenced by the above cited prior art, numerous attempts  
5 have been made to construct various fiberglass, plastic and  
6 laminated wood sticks that will have desirable characteristics.  
7 However, it is difficult to precisely control the resultant feel  
8 of laminated wood hockey sticks. Known plastic hockey sticks  
9 fail to provide the necessary feel, and they are substantially  
10 weaker than composite sticks. Fiberglass sticks tend to be a  
11 poor imitator of wood. Also, they tend to fracture and crack  
12 near attachment points. In other words, they are relatively  
13 brittle and easily split resulting in sharp edges.

14 Hence, it is desirable to provide an inexpensive hockey stick  
15 that displays superior strength and flex. Critically, the shaft  
16 must resist impulsive torsional forces resulting from slap shots  
17 and power shots that can break conventional composite sticks.  
18 Furthermore it is desirable to provide a stick that can be custom  
19 configured to provide a custom "feel." Alternatively, it is  
20 desirable to provide hockey stick shafts in which the flex varies  
21 as desired by a particular player.

22

#### 23 Summary of the Invention

24 My automated process for producing linearly pultruded hockey  
25 stick shaft material is carried out by a machine. The resulting  
26 sticks are inexpensive and they display superior strength and  
27 flexural ability relative to conventional fiberglass sticks.  
28 Arrangements of roving in the present hockey stick can be  
29 altered, and resin mixtures can be varied in formulation to  
30 provide a broad range of custom configurations.

31 The machine comprises a frame adapted to rest on a floor or  
32 similar surface. An elongated, hollow longitudinal mandrel is



substantially coextensive with the length of the frame. Strands  
2 of fiber known as "rovings" are disposed upon and pulled along  
3 the mandrel, forming alternating longitudinal and radial layers.  
4 The rovings are treated with resin and passed through dies while  
5 on the mandrel to form a hollow, pultruded product of generally  
6 rectangular cross section. The product can be cut up into hockey  
7 stick shafts.

8 A first veil is passed through a guide and wrapped around  
9 the mandrel. Longitudinal rovings are provided from a creel  
10 bank mounting several individual spools of rovings. The creel  
11 bank comprises a rack of shelves. The spools rest on the  
12 shelves, and rovings feed from the center of the spools. The  
13 rovings are routed through various guide orifices associated with  
14 frame members and the creel rack to direct them to the proper  
15 locations and prevent tangling. The rovings are fed around  
16 tension bars and wires mounted on the rack to insure proper  
17 tension as they are pulled along the mandrel.

18 A first longitudinal layer of rovings is initially formed  
19 about the veil. A roving set is fed through orifices defined in  
20 a first pattern card, and then fed through a generally  
21 rectangular opening in a gathering bracket to conform to the  
22 shape of the veil-wrapped mandrel. A first spiral winding  
23 station rotatably mounted to the frame wraps a first radial layer  
24 of rovings around the longitudinal rovings. This layer comprises  
25 a single ply having four separate strands forming concentric,  
26 spaced-apart windings in the form of a helix. The spiral winding  
27 station is a disk penetrated by the mandrel. It is turned by an  
28 electric motor. The disk mounts several spools of rovings on  
29 spindles. The spindles are synchronized by an anti-backlash  
30 mechanism.

31 A second set of longitudinal rovings is applied by a second  
32 pattern card and gathered by a second bracket. A second spiral

winding station, counter-rotating relative to the first, winds a second radial layer of rovings. The second radial layer also is comprised of separate, spaced apart rovings forming concentric spirals in the form of helixes. Strand segments of the two radial layers define an X-shaped pattern on sides of the pultruded shaft. The two spiral winding stations are driven by the same motor insuring the same rates of rotation.

A third longitudinal layer of rovings is applied by a third pattern card. However this layer is not gathered by a bracket but is fed directly into a resin injector die. Within the injector die, resin is injected into the rovings on the mandrel from the interior, outwardly. The resin is injected through a longitudinal bore in the mandrel. The bore is connected to a pressurized resin source at its proximal end. The portion of the mandrel encompassed by the injector die comprises two radial grooves having opposite pitches. Small diameter passages pass from the interior bore of the mandrel to the grooves. Resin passes through these passages to saturate the rovings. The injector die defines an ellipsoidal chamber which acts as a reservoir and a squeegee as the rovings pass through it. The squeegee action of the ellipsoidal chamber insures that resin is pressed into the rovings as it exits the injector die. The bore of the mandrel ends coincident with the distal end of the injector die.

Outer veils are applied to the resin wetted rovings. The newly veiled product is then passed through a heater die for curing. As the product passes out of the heater it passes through a curing die intended to insure that the product maintains its shape as it cures. The curing die has top and bottom longitudinal slots intended to relieve stress on the curing product and provide air circulation. The mandrel has a horizontal longitudinal slot at the distal end. This slot also

relieves stress on the curing product and promotes air circulation to facilitating curing of the interior of the product. The mandrel and the curing die terminate concurrently. The bitter end of the product is gripped by a set of modified industrial pullers commonly referred to as mules. These pullers alternate pulling the shaft providing a smooth rate of pultrusion through the machine.

The mandrel is segmented to prevent the pulled rovings from tightening on the mandrel and halting movement. The segments are defined by two abrupt reductions in the size of the mandrel, each immediately following the spiral winding stations.

The resulting hockey stick is comprised of a majority fiber rather than a majority resin as with conventional fiberglass hockey sticks. Preferably the present invention will result in a shaft which is approximately seventy percent fiber and thirty percent resin, by volume. As a result the present hockey stick shaft is stronger and has more desirable flexural properties. The rate of feed through the machine can be varied to produce hockey stick shafts which vary in flex from the upper portion to the lower portion.

Therefore, a primary object of the present invention is to provide an improved pultrusion process for manufacturing radially reinforced shafts.

Another primary object is to provide a low cost hockey stick which has superior strength and flexural qualities.

It is an object of the present invention to provide a hockey stick which can be custom configured for a particular user.

A related object of the present invention is to provide a hockey stick shaft that comprises is a majority fiber and a minority resin.

A more particular object of the present invention is to provide a hockey stick which is approximately seventy percent by

1 volume fiber and thirty percent resin.

2 It is an object of the present invention to provide a  
3 machine capable of producing a low cost hockey stick which has  
4 superior strength and flexural qualities.

5 It is an object of the present invention to provide a  
6 process for mass producing low cost hockey sticks exhibiting  
7 superior strength and flexural qualities.

8 An additional object is to provide a hockey stick shaft in  
9 which the flex varies from the upper portion to the lower  
10 portion.

11 Another primary object is to provide a method for the  
12 production of linear members by a pultrusion process.

13 An object of the present invention is to provide a pultruded  
14 product which is strong and has desirable flexural qualities.

15 A related object of the present invention is to provide a  
16 process for the production of linear members which results in a  
17 product having approximately thirty percent resin by volume and  
18 seventy percent fiber.

19 These and other objects and advantages of the present  
20 invention, along with features of novelty appurtenant thereto,  
21 will appear or become apparent in the course of the following  
22 descriptive sections.

#### 23 24 Brief Description of the Drawings:

25 In the following drawings, which form a part of the  
26 specification and which are to be construed in conjunction  
27 therewith, and in which like reference numerals have been  
28 employed throughout wherever possible to indicate like parts in  
29 the various views:

30 FIGURE 1 is a fragmentary, longitudinal isometric view of  
31 the overall preferred machine and process, with structural detail  
32 omitted for clarity;

FIGURE 2 is an enlarged, fragmentary view of a preferred hockey stick shaft formed through the disclosed pultrusion process, with the mandrel shown for purposes of illustration, and with layers of the process progressively broken away;

FIGURE 3 is an enlarged, isometric, fragmentary view of the first machine segment, showing the creel bank assembly adjacent the proximal end of the machine;

FIGURE 3A is an enlarged, fragmentary elevational view taken from the circled area of Figure 3;

FIGURE 4 is an enlarged, fragmentary, isometric view of the first pattern card and accompanying spiral winding station seen in Figure 3, with the feed strands omitted;

FIGURE 5 is an enlarged, fragmentary, perspective view of the pattern card system of Figure 4;

FIGURE 6 is a view similar to Figure 5, but taken generally between the pattern card and the collar of the first spiral winding station;

FIGURE 7 is an enlarged, fragmentary perspective view showing the distal side of a spiral winding station, with the tension backlash assembly illustrated therein;

FIGURE 8 is an enlarged, fragmentary pictorial view showing the injection die, the third pattern card and application of the outer veil;

FIGURE 9 is an enlarged, fragmentary longitudinal sectional view of the injector die taken generally along line 9-9 of Figure 8, with portions thereof broken away for clarity, illustrating the internal chamber;

FIGURE 9A is an enlarged, fragmentary cross section of the injector die taken generally along line 9A-9A of Figure 9 illustrating the die portion of the injector die;

2132567

FIGURE 9B is an enlarged, fragmentary cross section of the injector die taken generally along line 9B-9B of Figure 9 illustrating the internal chamber;

FIGURE 10 is an enlarged, fragmentary perspective view of the distal frame portion, showing the preferred heater;

FIGURE 10A is an enlarged, fragmentary cross section of the heater taken generally along line 10A-10A of Figure 10;

FIGURE 11 is an enlarged fragmentary sectional view taken generally along the line 11-11 of Figure 10;

FIGURE 12 is an enlarged, fragmentary perspective view of the paired pullers for drawing the pultruded product about the mandrel and through the machine;

FIGURE 13 is an enlarged fragmentary side view of a portion of the preferred mandrel illustrating a reduction in dimension in the mandrel;

FIGURE 14 is an enlarged cross section of the mandrel taken generally along line 14-14 of Figure 13; and,

FIGURE 15 is an enlarged, fragmentary side view of a portion of the preferred mandrel illustrating the effects of the reduction in dimension on the rovings being pulled along the mandrel.

#### Detailed Description

With attention now directed to the drawings, an automated process for producing liner pultruded products is broadly designated by the reference numeral 30. The product produced by the process 30 is designated by the reference numeral 32. The illustrated product is hockey stick shaft material 32. The machine which carries out the process 30 is broadly designated by the reference numeral 35. Some steps of the process and elements of the machine are repetitive. The processes carried out in the

1 proximal segment 35A of the machine are repeated in the distal  
2 segment 35B. These will be described in detail a single time.  
3 When an element or step is repeated, any differences between the  
4 duplicate and the original will be pointed out.

8 The process 30 is carried out on the machine 35 to produce  
6 hockey stick shaft material 32. The machine 35 comprises a frame  
7 37 adapted to support the machine 35 on a floor or similar  
8 supportive surface 39. A hollow longitudinal mandrel 40 passes  
9 through the frame 37. Rovings 45 are longitudinally and radially  
10 disposed on the mandrel 40 and treated with resin 47 while  
11 passing through dies to form the hockey sticks 32.

12 The rovings 45 are provided from a creel bank 50. The creel  
13 bank 50 mounts individual spools 55 of thread or rovings 45. The  
14 rovings 45 feed from the center of the spools 55 to the proximal  
15 segment of the machine 35A. A first veil 60 is wrapped around  
16 the mandrel 40 and the rovings 45 disposed about it. The veil 60  
17 is guided to the shape of the mandrel 40 by a guide 65. The  
18 rovings 45 are fed through a first pattern card 70 and then feed  
19 through a gathering bracket 75 to conform to the shape of the  
20 veil wrapped mandrel 40. This forms the first layer of  
21 longitudinal rovings 80 for the hockey stick 32. Next the  
22 rovings 45 and the veil 60 are wrapped at a spiral winding  
23 station 85 which disposes a first radial layer of rovings 90.

24 As the product 32 moves into the distal segment of the  
25 machine 35B, the next step is placement of a second layer of  
26 longitudinal rovings 110. The second longitudinal roving set 110  
27 is passed through a second pattern card 95 and gathered by a  
28 second bracket 100, forming the second longitudinal layer of  
29 rovings 110 on top of the first radial layer 90. A second spiral  
30 winding station 115 applies a second radial layer of rovings 120.  
31 Each of the radial layers of rovings 90 and 120 comprise helical  
32 spaced apart rovings.

The next step in the process 30 is application of a third longitudinal layer of rovings 130. The third roving set 130 is fed through a third pattern card 125 and fed directly into the proximal end 132 of a resin injector die 135. The injector die 135 directs the rovings 130 into contact with the second radial layer of rovings 120.

The mandrel 40 injects resin 47 from the interior of the veil 60 and rovings 45 outwardly. The resin 47 is confined by the injector die 135 and is squeegeed from the rovings 45, insuring resin 47 thoroughly saturates all the rovings 45 (Fig. 9). The injector die 135 has an internal shape that will form the desired exterior shape of the product 32. Outer veils 137 and 138 are then applied to the resin wetted rovings 45.

The newly veiled product is then passed through a heater 140 for curing. The heater 140 also has an internal shape approximating the desired exterior shape of the product 32. As the product 32 passes out of the heater 140 it passes through a slotted curing die 145. This die 145 insures that the product 32 maintains its shape as it cures coming out of the heater 140. The mandrel 40 and the curing die 145 terminate simultaneously. The bitter end of the shaft 32 is gripped by a pair of pullers 150 and 152. The type of puller illustrated is commonly referred to as a mule. These pullers 150 and 152 alternate pulling the shaft, providing a smooth rate of pultrusion through the machine 35.

With attention now directed to the machine 35 its elements will be described in greater detail. Many elements are reoccur throughout the machine 35. These elements will be designated with a single reference numeral and described once. Any differences between the duplicate and the original will be pointed out. The frame 37 is comprised of generally elongated



1 sides 155. The sides 155 are preferably constructed from channel  
2 iron. Perpendicular ends 160 and 161 mate with the sides 155.  
3 The first frame end defines a flanged orifice 162 for mounting  
4 the mandrel 40. Struts 163, 165 and 166 provide mounting  
5 positions for the pattern cards 70, 95 and 125 as well as  
6 stiffening the frame 37. The struts 163, 165 and 166 are  
7 constructed from paired sections of angle or channel iron  
8 defining a slot 163A, 165A and 166A therebetween. Cross members  
9 167 and 169 are rigidly welded between the frame sides 155 and  
10 mount the winding stations 85 and 115. Legs 170 support the  
11 frame 37 on the floor 39. The legs extend upwardly from the  
12 frame 37 to mount overhead guidebars 172. Lower guidebars 175  
13 extend between the legs 170 below the level of the frame 37. The  
14 guidebars 172, 175 provide orifices 177 to guide the rovings 45  
15 from the creel banks 50 to the pattern cards 70, 95 and 125. A  
16 frame extension 178 extends from the second frame end 161. It is  
17 primarily a section of I-beam supported by a single leg 170A.

18 The mandrel 40 is rigidly mounted to the first end 160 and  
19 it is suspended through the rest of the machine. The mandrel 40  
20 is generally rectangular in cross section. It has a central  
21 longitudinal bore 180. The bore 180 is open at the proximal end  
22 182 of the mandrel 40. It terminates near the distal end 184 of  
23 the injector die 135. In the area where the mandrel 40 passes  
24 through the injection die 135, small radial passages 185 extend  
25 from the bore 180 to the exterior surface of the mandrel 40 (Fig.  
26 9). The resin 47 is injected through the longitudinal bore 180.  
27 The bore 180 is connected to a pressurized resin source 181 at  
28 its open proximal end 182. The mandrel 40 has abrupt reductions  
29 in its exterior dimensions (segmentations) 187 and 189,  
30 immediately following each spiral winding station 85 and 115.  
31 These reductions in width and height prevent the pulled rovings  
32 45 from tightening on the mandrel 40 resulting in excessive drag

1 (Figs. 13 - 15). The distal end of the mandrel 186 is split to  
2 ease the interior tension on the pultruded product 32. In other  
3 words, the curing product 32 does not necessarily need the  
4 support of the entire mandrel 40 so to prevent binding the  
5 rigidity of the mandrel 40 is reduced by splitting it down the  
6 center. This split 183 also facilitates the circulation of air  
7 to the interior of the product 32, promoting curing and cooling.

8 The rovings 45 are fed from the creel bank 50 through the  
9 orifices 177 defined in the overhead and lower guidebars 172 and  
10 175 to the pattern cards 70, 95 and 125. The rovings 45 as  
11 mentioned above are fed from the center of spools 55 on the creel  
12 bank 50. The creel bank 50 is a rack 190 mounting shelves 192  
13 which holds the spools 55. The rovings 45 feed from the center  
14 of the spools 55 through guides 194 disposed in crossbars 196.  
15 Tension bars 198 and tension wires 200 also run across the rack  
16 190. The rovings 45 are fed under the tension bars 198 and over  
17 the tension wires 200 to insure that they are held taut during  
18 feeding.

19 The first veil guide 65 directs the inner veil 60 from a  
20 spool 205 onto the mandrel 40. The veil guide 65 is comprised of  
21 integral longitudinal sides 210 and top 215 which flare from the  
22 proximal portion of the mandrel 182 and narrow toward the first  
23 pattern card 70. The guide sides 210 and top 215 shape the veil  
24 60 to the contour of the mandrel 40. The bottom of the guide 220  
25 is preferably partially split. The front of the bottom 220 is  
26 beveled to further facilitate feeding of the veil 60.

27 The first pattern card 70 establishes four hole sets to  
28 facilitate placement of the first layer of longitudinal rovings  
29 80. This first pattern card 70 is typical of the other two  
30 pattern cards 95 and 125. Therefore, this description will  
31 suffice for those two cards 95 and 125 as well. As illustrated  
32 in Figure 4 the upper set of holes 225 receive six to seven

1 roving strands 45 for placement directly upon the veil 60 wrapped  
2 about the mandrel 40. Similarly, the bottom set 227 of holes  
3 receive rovings 45 from the lower guidebar 175 to be disposed  
4 along the bottom of the mandrel 40. A set of holes 229 and 230  
5 on either side of the mandrel 40 directs rovings to the sides of  
6 the veil wrapped mandrel 40. Half of the side rovings 45 fed  
7 through the side holes 229 and 230 are directed from the overhead  
8 guidebars 172 the other half come from the lower guidebars 175.

9 The rovings 45 feeding through the pattern cards 70, 95 and  
10 125 can be divided into six groups at each card. The rovings 45  
11 which will become the top longitudinal rovings 235 come from the  
12 overhead guidebars 172. The other rovings coming from the  
13 overhead guidebars 172 are shunted to either side to form the  
14 upper side rovings 237 and 240 of the longitudinal rovings 80,  
15 110 and 130. The rovings 45 fed from the lower guidebars 175 are  
16 similarly divided into the bottom longitudinal rovings 242 and  
17 lower side rovings 244 and 245.

18 Tension is maintained in the rovings 45 by the tension bars  
19 198 and wires 200 associated with the creel rack 190. Additional  
20 tension is present due to the rovings 45 passing through the  
21 orifices 194 associated with the cross bars 196 on the creel rack  
22 190, orifices 177 on guidebars 172 and 175 and orifices 225, 227,  
23 229 and 230 on pattern cards 70, 95 and 125. Tension is  
24 necessary to hold the rovings 45 against the mandrel 40 until the  
25 resin 47 is applied.

26 A first gathering bracket 75 is defined between the first  
27 pattern card 70 and the first spiral winding station 85. A  
28 similar, second bracket 100 is defined between the second pattern  
29 card 95 and second winding station 115. However, a gathering  
30 bracket is not associated with the third pattern card 125. The  
31 proximal end 132 of the injector die 135 acts to gather the  
32 rovings 45 from the third pattern card 125. The gathering,

2132567

1 brackets 70 and 100 are generally triangular. They comprise a  
2 pair of spaced apart arms 260 and 262 extending from the first  
3 strut 163. The arms 260 and 262 converge forming a generally  
4 rectangular opening 265. The interior dimensions of the opening  
5 265 approximate the desired exterior dimensions of the product  
6 32. As the rovings 45 are fed through the opening 265 they are  
7 directed against the mandrel 40 forming the first two  
8 longitudinal layers 80 or 110. The spiral winding stations 85  
9 and 115 wrap radial layers of rovings 90 and 120 over the first  
10 two layers of longitudinal rovings 80 and 110. The radial layers  
11 90 and 120 help maintain the first two longitudinal layers 80 and  
12 110 in place.

13 The first spiral winding station 85 is similar to the second  
14 115. The primary difference between the two stations 85 and 115  
15 is that they rotate in opposite directions. The spiral winding  
16 stations 85 and 115 are each comprised of a rotatable disk 275  
17 coaxially penetrated by the mandrel 40. The rotatable disk 275  
18 comprises a generally circular plate 277 mounted on a hollow  
19 shaft 280. A generally cylindrical collar 282 is centrally  
20 mounted to the plate 277, employing spacers 283. The collar 282  
21 and shaft 280 are coaxially penetrated by the mandrel 40. The  
22 collar comprises radially spaced apart feed orifices 285 which  
23 receive rovings 45 fed from four radially spaced apart spools 290  
24 rotatably mounted to the disk plate 277. As the disk 275 is  
25 rotated the rovings 45 are fed from the exterior of the spools  
26 290 onto the longitudinal rovings 80 or 110 disposed on the  
27 mandrel 40. Each frame crossmember 167 and 169 extending between  
28 the frame sides 155 comprises a hub 295 which receives the disk  
29 shaft 280. The disk shaft 280 is rotated by a chain and sprocket  
30 assembly 300. The driven sprocket 305 is secured to the shaft  
31 280.

32

1       An anti-backlash system 310 for the disk spools 290 is  
2 disposed on the opposite side of the plate 277 (Fig. 7).  
3 Rotatable spindles 315 for mounting the spools 290 extend  
4 through the disk plate 277. The spindles 315 are mounted in  
5 journals 317 secured to the plate 277. The spindles 315 are  
6 hollow and have grease fittings 320 to allow internal greasing of  
7 the spindle 315 and journal 317. Pulleys 325 are mounted on the  
8 spindles 315, opposite the spools 290. The pulleys 325 are  
9 interconnected by a V-belt 327 to insure synchronization and  
10 preservation of tension. Tension provides drag on the rovings 45  
11 windings from the spools onto the mandrel 40. Synchronization  
12 and tension prevents over-rotation thereby preventing slack in  
13 the rovings 45 and reducing the danger of tangling.

14       Each radial layer of rovings 90 or 120 comprises four  
15 separate concentric roving helixes wound about the underlying  
16 longitudinal layer of rovings 80 or 110. The first layer of  
17 radial rovings 90 is comprised of roving helixes 331, 332, 333  
18 and 334. The second layer of radial rovings 120 is comprised of  
19 roving helixes 336, 337, 338 and 339. The counter rotation of  
20 the winding stations 85 and 115 produce a crossed or "X" pattern  
21 between the roving helixes 331-334 and 336-339. The counter  
22 rotation of the second winding station 115 and resulting "X"  
23 pattern is achieved by interconnecting the two spiral winding  
24 stations 80 and 115 and driving them with the same motor 345.

25       Preferably an electric motor 345 drives the spiral winding  
26 stations 80 and 115. It drives a right-angle gear assembly 346  
27 via a primary chain drive 347. Chain drive assemblies 300 and  
28 347 are used to reduce the high speed of the motor 345 to the  
29 slower speed required by the spiral winding of stations 80 and  
30 115. The primary chain drive 347 comprises an output sprocket 348  
31 mounted on the output shaft of the motor 345; a chain 349; and an  
32 input sprocket 350 mounted on the input shaft of the right-angle

1 gear assembly 346. The right-angle gear assembly 346 has an  
2 output driveshaft 352 or 354 on either side. The driveshafts 352  
3 and 354 rotate in opposite directions. The spiral winding  
4 station chain and sprocket assemblies 300 are driven by the  
5 driveshafts 352 and 354. The drive sprockets 353 of the station  
6 assemblies 300 are mounted on the driveshafts 352 and 354. As a  
7 result, the spiral winding stations 80 and 115 are driven at the  
8 same speed by the motor 345 but in opposite directions.

9 As mentioned above the third pattern card 125 feeds directly  
10 into the proximal end 132 of the resin injector die 135. The  
11 mandrel 40 extends through the resin injector die 135. The  
12 radial passages 185 in the mandrel 40 begin just within the  
13 injector die 135. These passages 185 conduct resin 47 from  
14 inside the mandrel 40 into the rovings 45 disposed about the  
15 mandrel 40. The radial passages 185 open onto shallow, radial  
16 grooves 355 cut into the exterior of the mandrel 40. The grooves  
17 355 facilitate passage of resin 47 from the passages 185. The  
18 resin injector die 135 insures that the resin 47 is confined  
19 within the rovings 45; fully saturating them.

20 The injector die 135 is comprised of a generally  
21 parallelepiped housing 360. The housing 360 is comprised of  
22 generally parallel spaced apart sides 362 and 365, a  
23 perpendicular top 367 and bottom 370. The die 135 is constructed  
24 of individual pieces which may be disassembled to facilitate  
25 cleaning. The sides 362 and 365 are generally "C" shaped. The  
26 legs 372 of the sides 362 and 365 are beveled to provide the  
27 exterior of the product with beveled corners. The top 367 and  
28 bottom 370 act as spacers joining the opposite legs 372 of the  
29 "C" shaped sides 362 and 365. Aligned bolting orifices extend  
30 through the sides 362 and 365, top 367 and bottom 370 to receive  
31 allen bolts and nuts. The central passage 375 defined by the  
32 injector die 135 has a central reservoir cavity 380. The

1 reservoir cavity 380 is a slightly enlarged portion of the  
2 passage 375 having a curved outer wall 382. The reservoir 380  
3 allows the resin 47 to collect so it will fully saturate the  
4 rovings 45 as they feed through. However, the ellipsoidal shape  
8 of the reservoir cavity 380 (FIG. 9) also acts as a squeegee to  
6 insure that excess resin 47 is removed as the rovings 45 pass out  
7 of the reservoir cavity 380. This squeegee action insures that  
8 the resin 47 saturates the rovings 45 by forcing the resin 47  
9 into the rovings 45.

10 Outer veils 137 and 138 are applied to the resin impregnated  
11 rovings 45A as they come out of the injector 135. Spools 390  
12 holding the outer veils 137 and 138 are disposed on spindles 395  
13 affixed to the interior of each frame side 155. The veils 137  
14 and 138 pass from the spools 390 across idlers 400 into a folder  
15 405. The folder is comprised of two generally "C" shaped flanged  
16 sides 410 and 412 which contour the veil to the shape of the  
17 resin impregnated rovings 45 on the mandrel 40. All the  
18 components of the finished product 32 are now disposed on the  
19 mandrel 40.

20 Next, the veiled rovings 45 are fed into the heater 140.  
21 The heater 140 is mounted by flanges 415 extending from a slot  
22 161A defined by the second end 161 of the frame 37. The heater  
23 140 also acts as a die to shape the exterior of the product 32.  
24 The heater 140 is comprised of a housing 420 having a similar to  
25 the injector 135. It has generally "C" shaped sides 422 and 425  
26 bolted to a relatively narrow top 430 and bottom 435. The legs  
27 437 of the sides are beveled similar to the injector die 135.  
28 Heating elements 440 are disposed on the exterior of the heater  
29 housing 420. The elements 440 are comprised of electrical  
30 resistive heating strips 445 disposed on diffusers 447 which are  
31 fixed directly to the housing 420. The diffusers 447 are made of  
32 a refractory material intended to spread heat evenly to the

1 housing 420. As the curing product 32 passes out of the heater  
2 140 it is passed through a curing die 145.

3 The curing die 145 is comprised of two, opposed "C" shaped  
4 sides 450 and 455, facing one another, defining upper and lower  
8 slots 457 and 458 therebetween. The curing die 145 facilitates  
6 retention of the desired shape of the product 32 during curing.  
7 Curing should be complete by the time the material passes out of  
8 the curing die 145. The split 183 in the distal end of the  
9 mandrel 186 begins concurrent with the curing die 145. The  
10 mandrel 40 also terminates concurrent with the distal end 460 of  
11 the curing die 145. As pointed out above the split 183 relieves  
12 tension on the finished product and allows circulation of air to  
13 the product 32 to promoting curing and cooling. The slots 457  
14 and 460 in the curing die 145 accomplish a similar task.

18 The product feeds from the mandrel into pullers 150 and 152  
16 (Fig. 12). The pullers 150 and 152 alternately grasp the  
17 finished product and pull it, longitudinally. This draws the  
18 rovings 45 through the machine 35. The pullers 150 and 152 are  
19 conventional linear industrial pulling devices. Preferably, two  
20 pullers 150 and 152 are used to provide a constant speed and  
21 smoothness of pull. The use of this type of devices is  
22 important, so that tension is maintained on the rovings 45 and  
23 therefore the product 32 is of as high a quality as possible.

24 The pullers 150 and 152 are mounted on a frame 470. The  
25 puller frame 470 is generally aligned with the frame extension  
26 178. The puller frame 470 is primarily an I-beam rail 472  
27 supported by a pair of legs 473. The pullers 150 and 152 are  
28 slidably coupled to the rail 472. Each puller 150 and 152  
29 comprises a generally rectangular framework 475. The lower  
30 portion 478 of the framework slidably captivates the rail 472. A  
31 horizontal sill 480 extends across the framework 475, above the  
32 rail 472. The upper portion 483 of the framework mounts a



1 pneumatically operated press 485.

2 In operation the product 32 is grasped between the press 485  
3 and the sill 480. The framework 475 is slid forwardly by a  
4 hydraulic cylinder 490 extending between the framework 475 and  
5 the rail 472. An arm 492 extending from the framework 475  
6 contacts a first switch 495. The first switch 495 signals the  
7 press 485 to open and the cylinder 490 to retract. The  
8 retracting cylinder 490 slides the framework 475 back along the  
9 rail 472. A second switch 500 is contacted by the arm 492 when  
10 the framework 475 is slid back sufficiently. This signal closes  
11 the press 485, and the process is repeated. One puller 150 or  
12 152 is closed at all times and is sliding forward as indicated by  
13 arrow 505. The other 152 or 150 is open and sliding back, as  
14 indicated by arrow 510. Thus, a constant rate of smooth pulling  
15 is provided.

16 From the foregoing, it will be seen that this invention is,  
17 one well adapted to obtain all the ends and objects herein set  
18 forth, together with other advantages which are inherent to the  
19 structure.

20 It will be understood that certain features and  
21 subcombinations are of utility and may be employed without  
22 reference to other features and subcombinations. This is  
23 contemplated by and is within the scope of the claims.

24 As many possible embodiments may be made of the invention  
25 without departing from the scope thereof, it is to be understood  
26 that all matter herein set forth or shown in the accompanying  
27 drawings is to be interpreted as illustrative and not in a  
28 limiting sense.

29

30

31

32

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY IS CLAIMED AS FOLLOWS:

- 1
- 2 1. An automated pultrusion machine for producing linear
- 3 products, said machine comprising:
- 4 a rigid elongated frame adapted to be disposed upon a
- 5 supporting surface;
- 6 a creel bank comprising a plurality of spools, each spool
- 7 supplying a roving to said machine;
- 8 an elongated, rigid mandrel supported by said frame
- 9 extending substantially along the length of the machine;
- 10 means for supplying an inner veil at the front of said
- 11 machine and directing it upon said mandrel;
- 12 a first pattern card supported by said frame for converging
- 13 a first pattern of rovings toward said mandrel;
- 14 a gathering bracket for receiving said first pattern of
- 15 rovings and forcing said rovings into abutment with said mandrel
- 16 and said inner veil to establish a first longitudinal layer of
- 17 rovings;
- 18 a first spiral winding station rotatably secured to said
- 19 frame for spirally wrapping rovings radially about said first
- 20 longitudinal layer of rovings and said mandrel in a first radial
- 21 direction relative to said mandrel, thereby establishing a first
- 22 roving layer of concentric helixes;
- 23 a second pattern card supported by said frame for converging
- 24 a second pattern of rovings toward said mandrel;
- 25 a second gathering bracket for receiving the second pattern
- 26 of rovings and forcing said last mentioned rovings into abutment
- 27 with said mandrel to establish a second longitudinal layer of
- 28 rovings;
- 29 a second spiral winding station rotatably secured to said
- 30 frame for spirally wrapping rovings radially about said second
- 31 longitudinal layer of rovings and said mandrel in a radial
- 32 direction opposite to said last mentioned radial direction,

1 thereby establishing a second roving layer of concentric helixes;  
2 a third pattern card supported by said frame for converging  
3 a third pattern of rovings toward said mandrel;  
4 resin injection means penetrated by said mandrel for  
5 receiving the third pattern of rovings and forcing said last  
6 mentioned rovings into abutment with said mandrel to establish a  
7 third longitudinal layer of rovings and for saturating the roving  
8 layers and inner veil in resin;  
9 means for directing an outer veil upon said wetted rovings;  
10 heater means penetrated by said mandrel for heating the  
11 resin impregnated product; and,  
12 means for pulling the product through the machine about the  
13 mandrel at a predetermined linear speed.  
14 2. The pultrusion machine of claim 1 further comprising means  
15 for synchronizing said spiral winding stations with one another.  
16 3. The pultrusion machine of claim 2 further comprising means  
17 for synchronizing the radial speed of said spiral winding  
18 stations with said linear speed established by said pulling  
19 means.  
20 4. The pultrusion machine of claim 1 wherein said mandrel is  
21 segmented.  
22 5. The pultrusion machine of claim 1 wherein said resin  
23 injection means comprises means for interiorly injecting resin  
24 through said mandrel.  
25 6. The machine as defined in claim 1 wherein each said spiral  
26 winding station comprises;  
27 a rotatable disk coaxially penetrated by said mandrel;  
28 a rotatable collar secured to said disk coaxially  
29 surrounding said mandrel; and,  
30 a plurality of radially spaced apart spools rotatably  
31 mounted on said disk, each of said spools feeding a roving toward  
32 said collar to form a separate concentric helix.

7. The machine as defined in claim 6 including anti-backlash  
2 means for synchronizing and tensioning said last mentioned  
3 plurality of radially spaced apart spools.

4 8. The machine as defined in claim 7 wherein said disk  
5 comprises:

6 a rotatable plate secured to a hollow shaft; said shaft  
7 penetrated by said mandrel; and

8 a hub for receiving said shaft, said hub secured to a cross  
9 piece mounted to said frame.

10 9. The machine as defined in claim 1 wherein said frame further  
11 comprises guide means at the top and bottom of said frame for  
12 directing said roving sets.

13 10. An automated pultrusion method for producing linear  
14 products, said method comprising the steps of:

15 providing a plurality of roving sources from a creel bank  
16 comprising a plurality of spools;

17 forming and drawing the product through the process about  
18 and upon an elongated, rigid mandrel;

19 guiding an inner veil upon said mandrel;

20 feeding a first set of rovings through a first pattern card  
21 for converging said first set of rovings toward said mandrel;

22 gathering said first set of rovings into abutment with said  
23 mandrel and said inner veil to establish a first longitudinal  
24 layer of rovings;

25 spirally winding rovings radially about said first  
26 longitudinal layer of rovings and said mandrel in a first radial  
27 direction relative to said mandrel, thereby establishing a first  
28 radial layer of separate roving helixes;

29 feeding a second set of rovings through a second pattern  
30 card for converging said second set of rovings toward said  
31 mandrel;

32

1 gathering said second set of rovings into abutment with  
2 said first radial layer of rovings and said mandrel to establish  
3 a second longitudinal layer of rovings;  
4 spirally winding rovings radially about said second  
5 longitudinal layer of rovings and said mandrel in a second,  
6 opposite radial direction relative to said mandrel, thereby  
7 establishing a radial layer of separate roving helixes;  
8 feeding a third set of rovings through a third pattern card  
9 for converging said third set of rovings toward said mandrel;  
10 gathering said third set of rovings into abutment with said  
11 second radial layer of rovings and said mandrel to establish a  
12 third longitudinal layer of rovings;  
13 saturating said inner veil and roving layers in resin;  
14 guiding an outer veil upon said third longitudinal layer of  
15 rovings; and,  
16 heating said product to cure said resin.

17 11. The pultrusion process of claim 10 wherein said winding  
18 steps are synchronized.

19 12. The pultrusion process of claim 11 wherein the speed of said  
20 pulling set is synchronized with the radial speed of said  
21 winding steps.

22 13. The pultrusion process of claim 12 wherein said saturating  
23 step comprises interiorly injecting said rovings and inner veil  
24 with resin.

25 14. The pultrusion process of claim 13 further comprising the  
26 set of guiding said roving sets from said creel bank to said  
27 cards throughout the process.



28 15. The product produced by the process of claim 10.

29 16. The product produced by the process of claim 14.

30 17. A hockey stick shaft comprising:  
31 a longitudinal central cavity defining an interior of said  
32 shaft;

- 1 an open proximal end adapted to receive a plug;  
2 an open distal end adapted to mate with a blade;  
3 a first longitudinal layer of rovings;  
4 a first radially wound layer of rovings spiraled about said  
5 first longitudinal layer and comprising individual, spaced apart,  
6 concentric roving helixes;  
7 a second longitudinal layer of rovings formed on said first  
8 radially wound layer;  
9 a second radially wound layer of rovings spiraled about said  
10 second longitudinal layer and comprising individual, spaced  
11 apart, concentric roving helixes;  
12 a third longitudinal layer of rovings disposed on said  
13 second radially wound layer; and,  
14 an outer veil enveloping said third longitudinal layer.  
15 18. A shaft as defined in claim 17 wherein said first and second  
16 radially wound layers are oppositely pitched.  
17 19. A shaft as defined in claim 17 wherein said matrix comprises  
18 approximately thirty percent by volume said shaft.  
19 20. A shaft as defined in claim 18 wherein said cavity is  
20 generally rectangular in cross section and said matrix comprises  
21 an interior and exterior generally rectangular in cross section.  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32



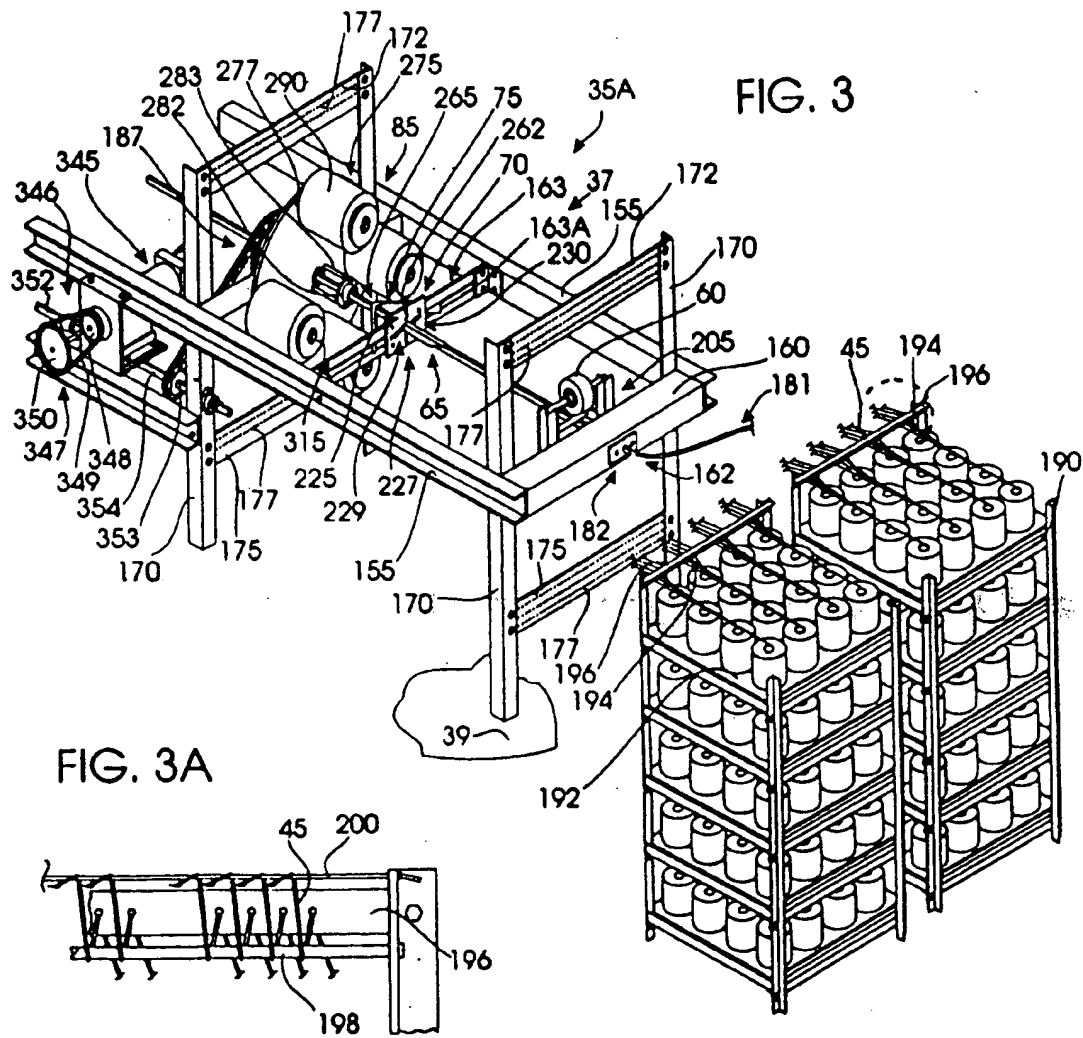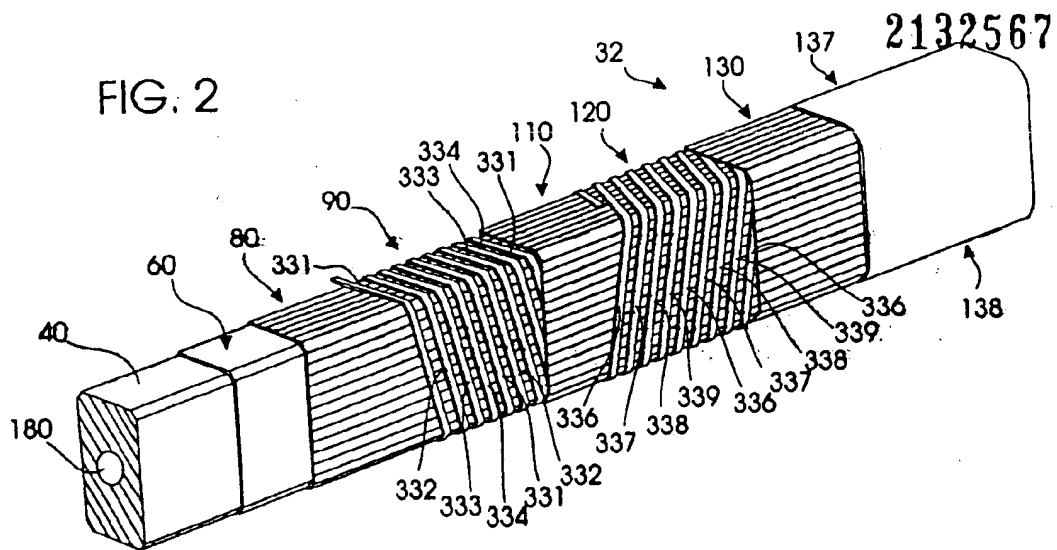





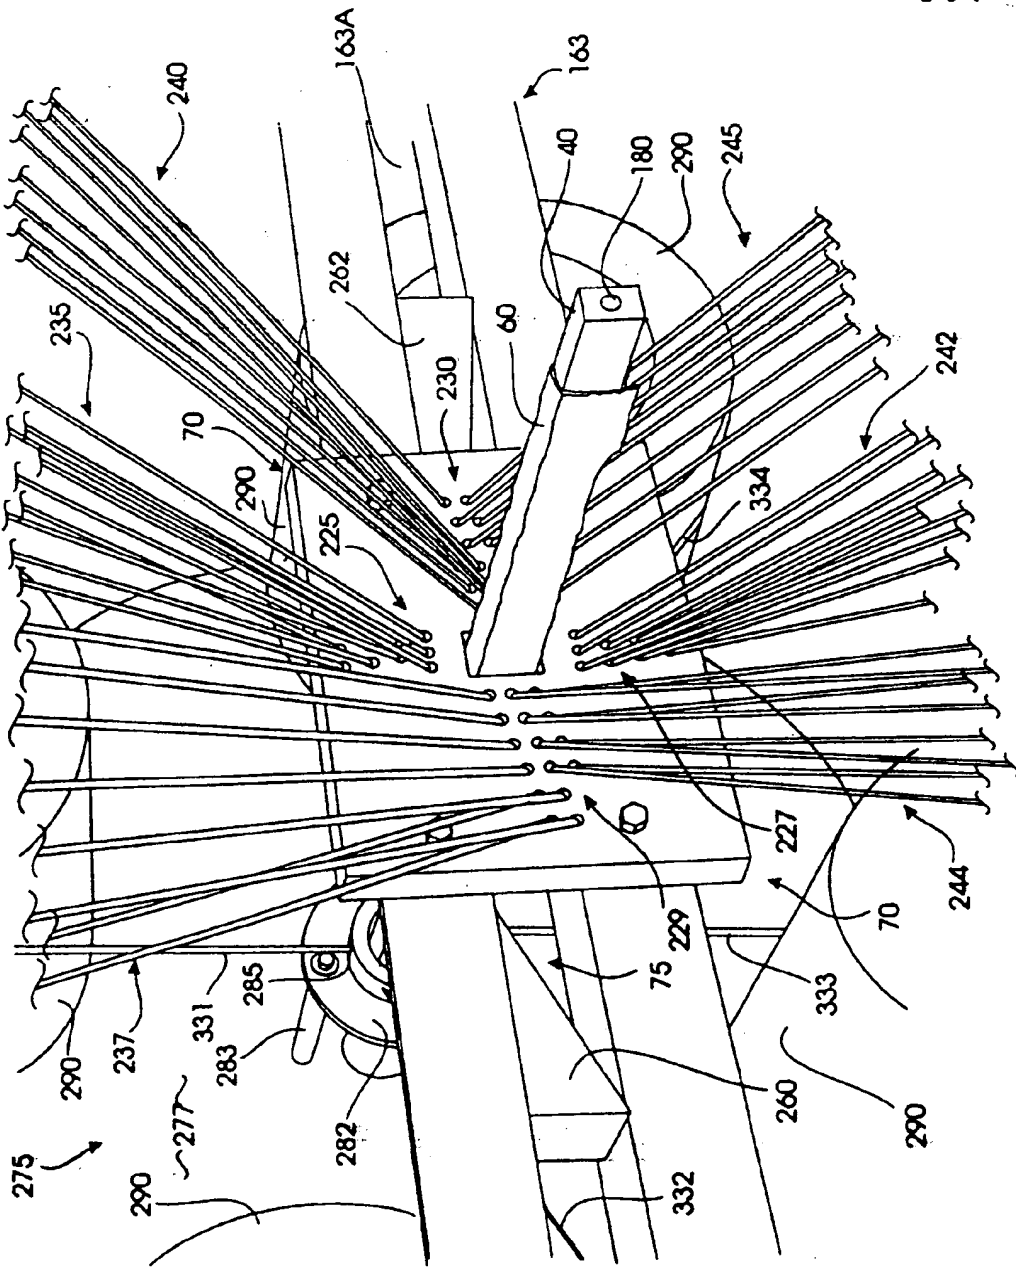


FIG. 5

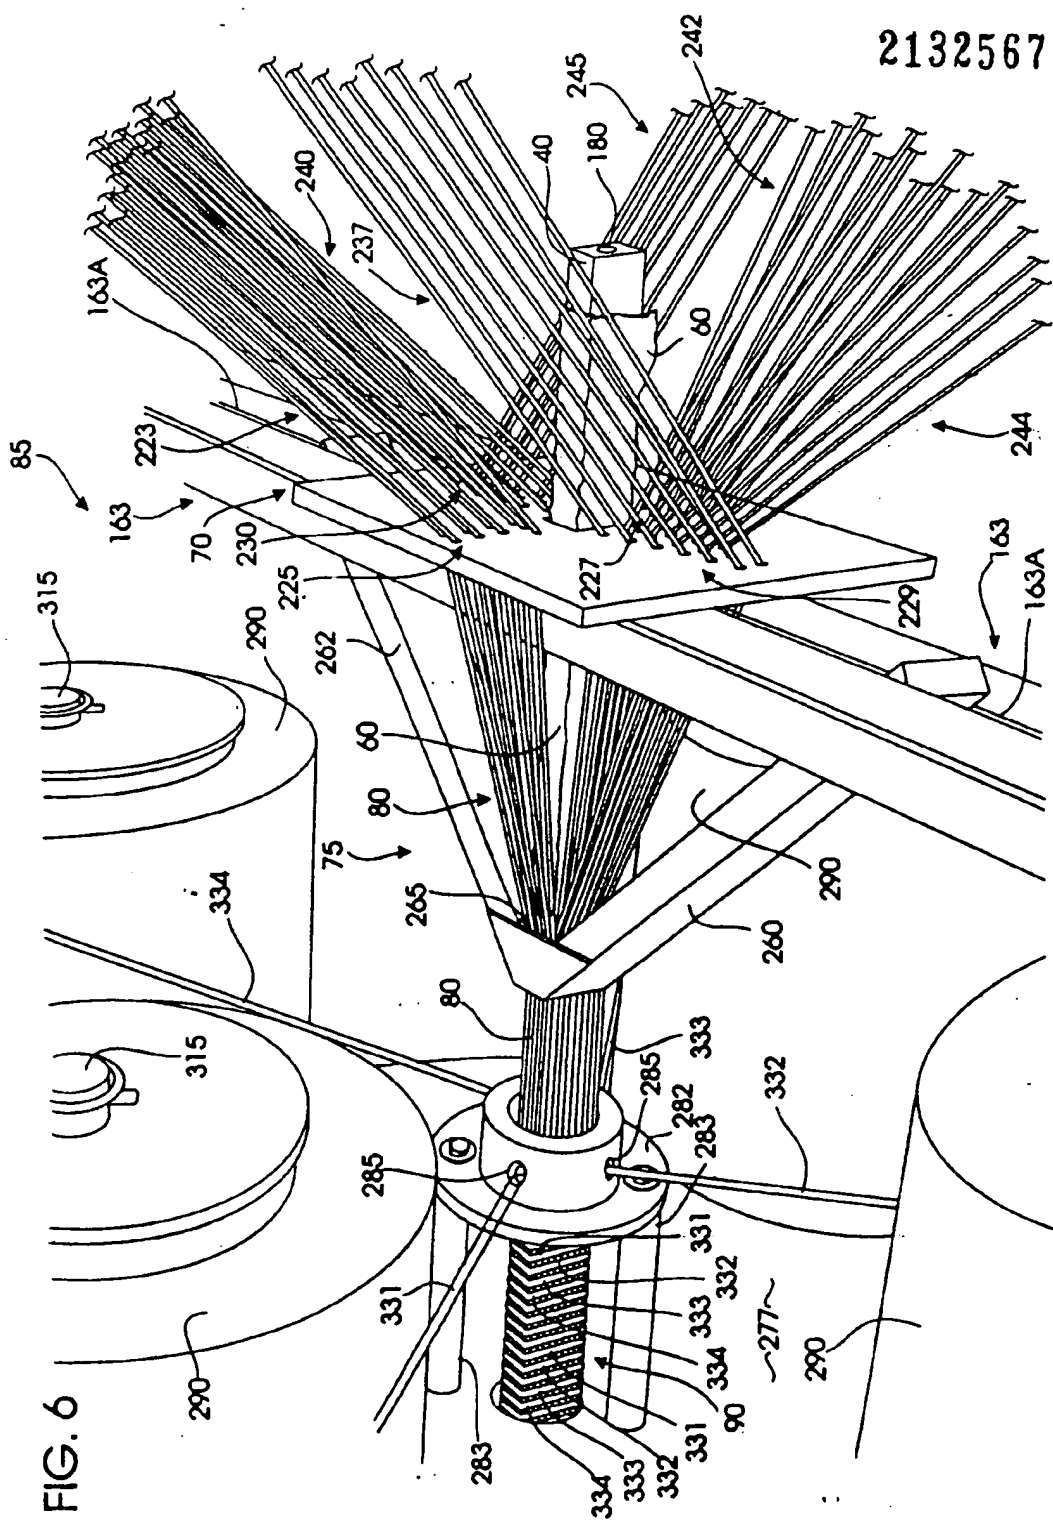


FIG. 6



2132567

FIG. 8

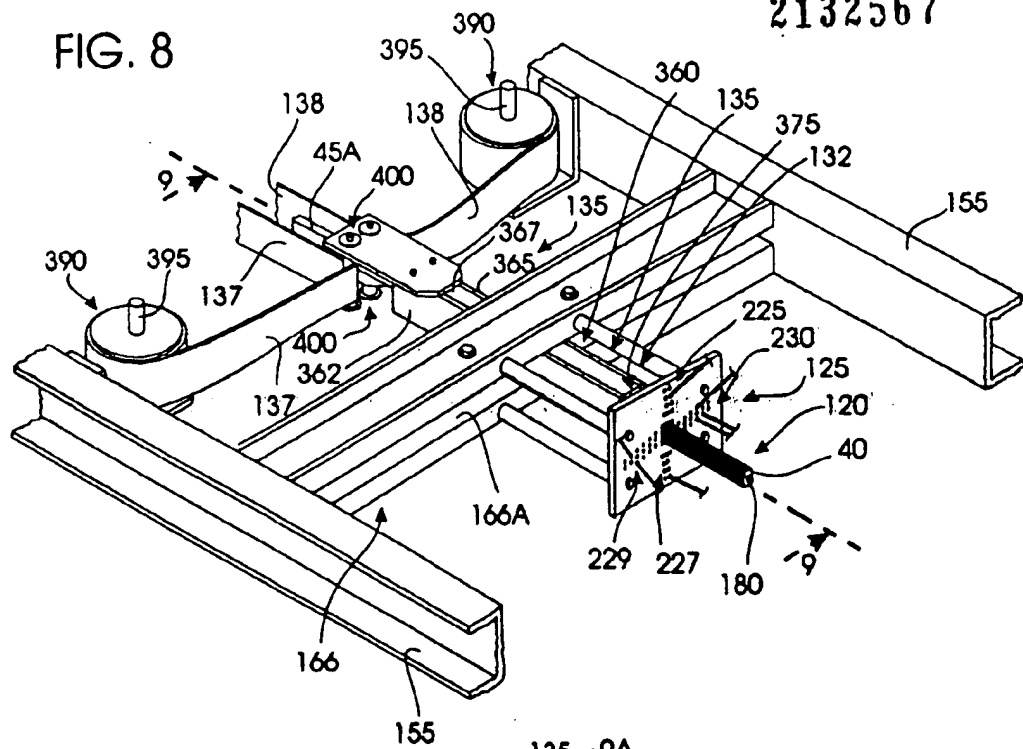


FIG. 9

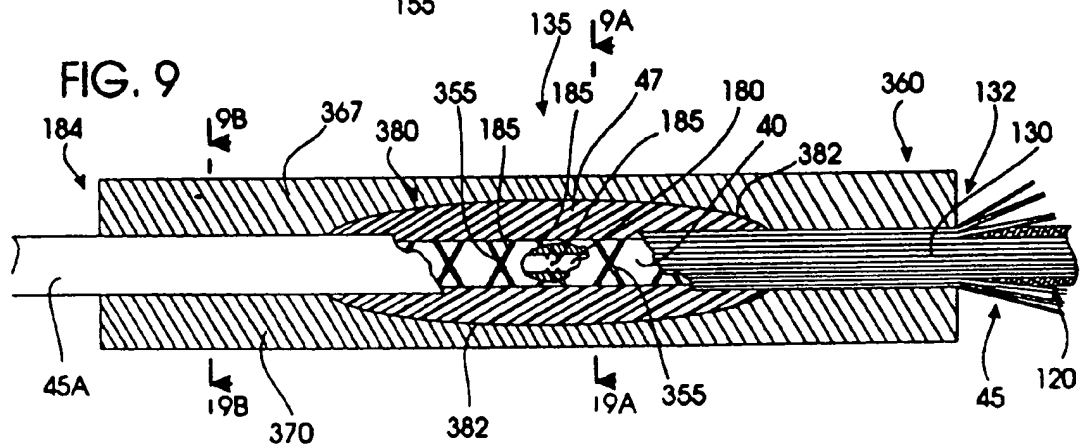


FIG. 9B


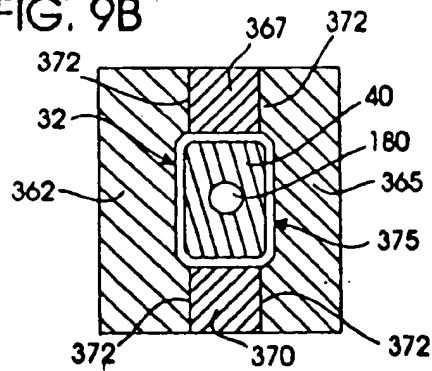


FIG. 9A

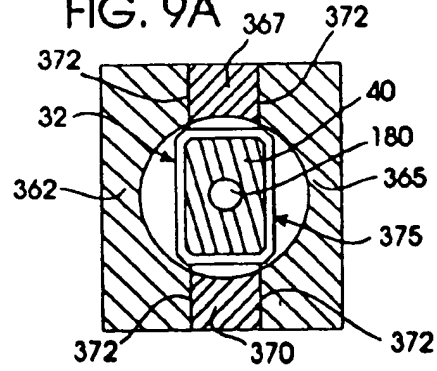

2132567

FIG. 10

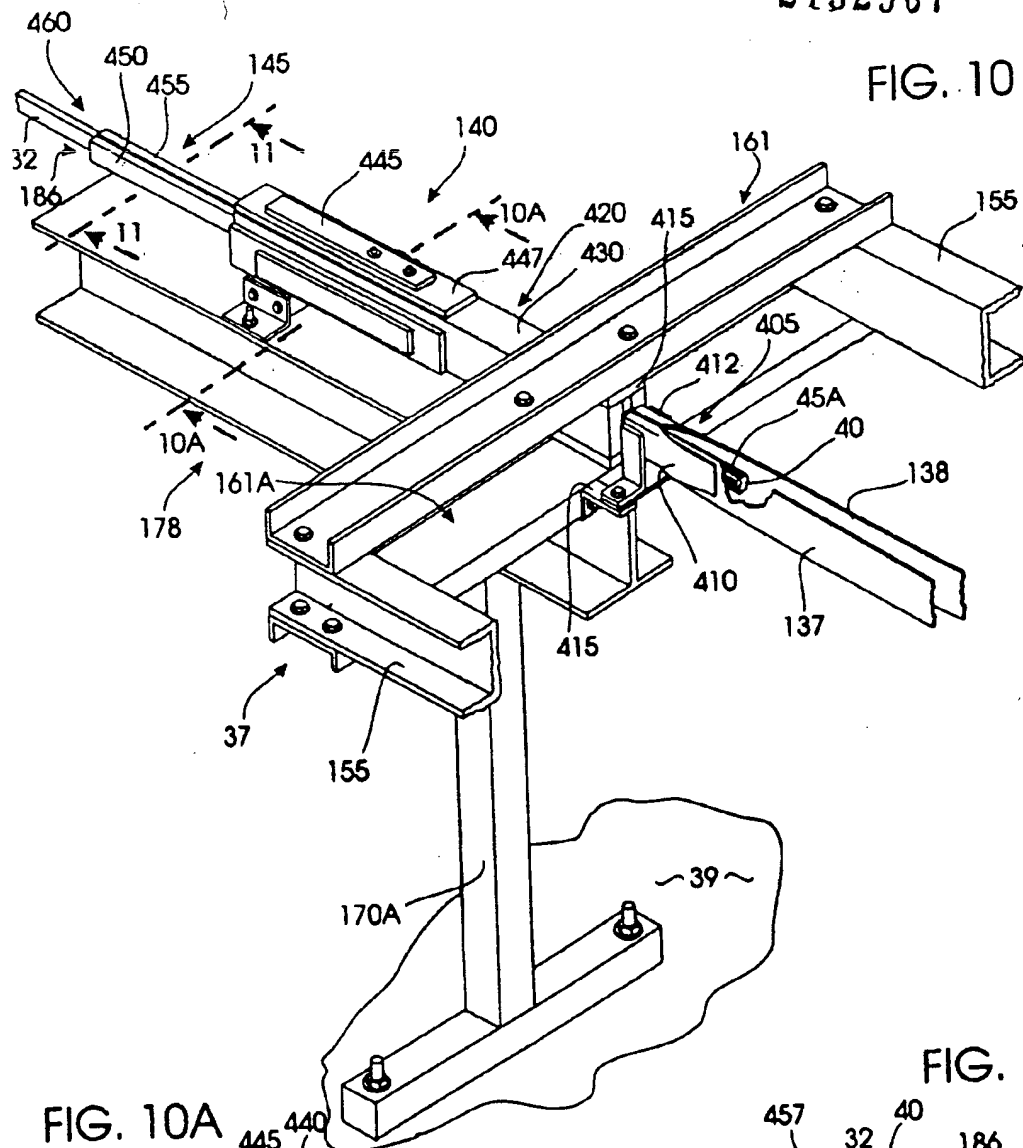


FIG. 10A

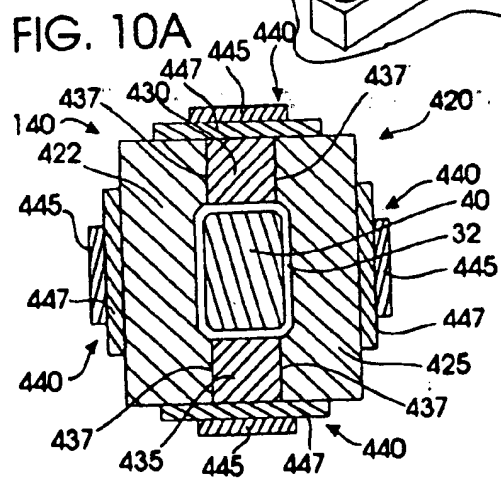
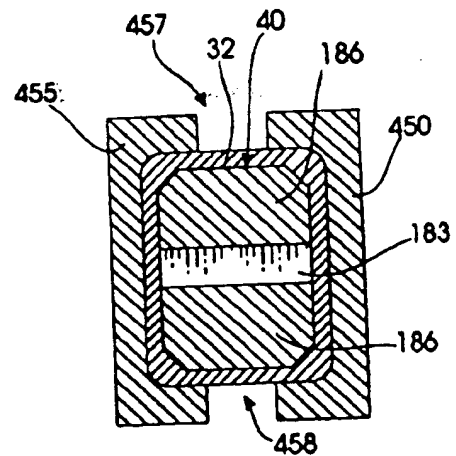


FIG. 11



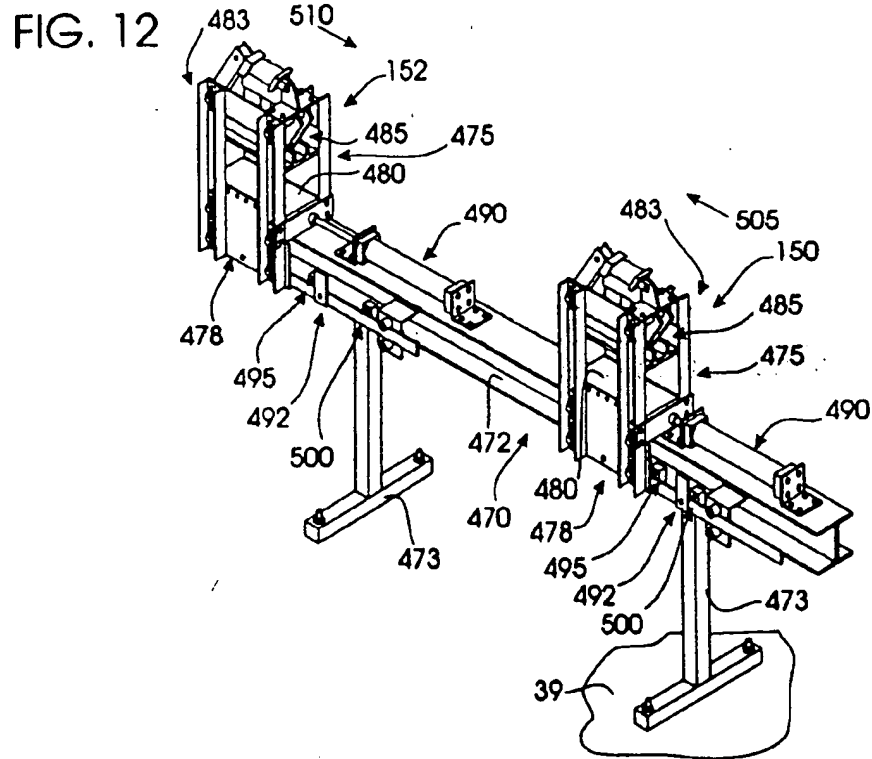


FIG. 14




FIG. 13

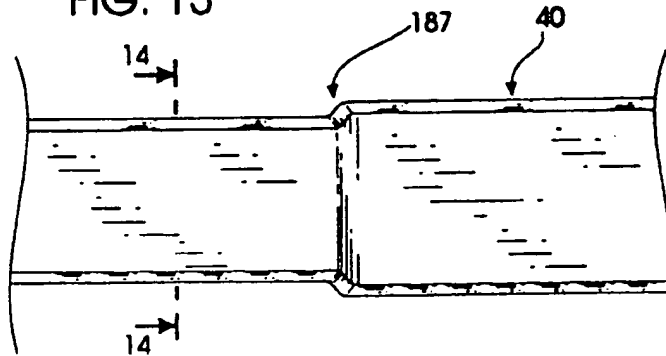


FIG. 15

